

# Surface Mount Pot Core Inductor

The Surface Mount Pot Core Inductors manufactured by Engineered Components Company are designed for RF/low power applications utilizing low-loss ferrite core material. The pot core inductor design shields and isolates the winding from stray magnetic fields and effects from the surrounding circuit elements.

The standard inductance value tolerance is +/-10% when measured at the frequencies listed (see Table 1). Inductance values and Q values are measured on an HP 4284A LCR meter. Since inductance values vary with AC/DC current values, each end application should be evaluated to ensure proper readings. The tabulated current ratings are those calculated to cause a 25 deg. C rise in case temperature. These pot core inductors are designed to meet the applicable portions of MIL-C-15305, Grade 1, Class B. Temperature coefficient of inductance is less than 400ppm/deg. C over the operating temperature range of -30 to +70 deg. C. Inductors are capable of withstanding 500Vdc @ 50 uA applied between the coil and the case.

The inductor and the four phosphor-bronze leads (lead-tin plated) are mounted on a Liquid Crystal Polymer platform, off-white in color, and secured in epoxy resin by utilizing a black Diallyl Phthalate case. Finished inductor sizes are shown in Table 2. Any exposed pot core is coated with a conformal coating. Marking, applied by Laser Label, designates one coil termination lead with an indicator dot (see Figure 1). The opposite lead is also a coil termination lead, while the leads at 90 deg. locations are no-connection mounting leads.

Product Selection Table

PART NUMBER	L(mH)	SIZE	DCR (TYP.)	Q (NOM.)	SRF TYP. (MHz.)	RATED I <sub>bc</sub> (mA)
SMPCI-1.0	1.0	1	2.5	150	1.25	350
SMPCI-1.2	1.2	1	3.0	160	1.15	320
SMPCI-1.5	1.5	1	3.5	180	1.08	290
SMPCI-1.8	1.8	1	4.0	200	1.00	270
SMPCI-2.2	2.2	2	5.5	200	.89	270
SMPCI-2.7	2.7	2	6.0	210	.85	260
SMPCI-3.3	3.3	2	6.5	230	.73	250
SMPCI-3.9	3.9	2	7.0	250	.68	240
SMPCI-4.7	4.7	3	5.5	135	.72	300
SMPCI-5.6	5.6	3	6.0	150	.58	290
SMPCI-6.8	6.8	3	7.0	165	.55	270
SMPCI-8.2	8.2	3	8.0	180	.52	250
SMPCI-10	10	4	10	170	.37	260
SMPCI-12	12	4	11	190	.35	250
SMPCI-15	15	4	12	220	.33	240
SMPCI-18	18	4	13.5	240	.30	230
SMPCI-22	22	4	15	280	.28	220
SMPCI-27	27	5	11	150	.19	280
SMPCI-33	33	5	12	165	.17	270
SMPCI-39	39	5	14	180	.16	250
SMPCI-47	47	5	16	190	.15	230
SMPCI-56	56	6	18	200	.105	230
SMPCI-68	68	6	20	210	.100	220
SMPCI-82	82	6	22	240	.095	210
SMPCI-100	100	6	24	270	.090	200
SMPCI-120	120	7	32	300	.065	250
SMPCI-150	150	7	35	330	.063	240
SMPCI-180	180	7	38	360	.061	230
SMPCI-220	220	7	42	400	.059	220
SMPCI-270	270	8	28	170	.045	330
SMPCI-330	330	8	31	180	.043	310
SMPCI-390	390	8	35	190	.041	290
SMPCI-470	470	8	38	200	.039	280
SMPCI-560	560	9	48	210	.038	290
SMPCI-680	680	9	54	220	.034	270
SMPCI-820	820	9	60	230	.030	260

Special modules can often be manufactured to provide for customer specific applications.

Table 1

Test Frequency Table


L(Mh) RANGE	L & Q TEST FREQUENCY
1.0 - 4.3	79KHz
4.3 - 25	25KHz
25 - 250	7.9KHz
250 - 1000	2.5KHz

Table 2

Size Table

SIZE	A	B	C	D
1	.525	.300	N/A	.500
2	.570	.320	.360	.545
3	.670	.360	.430	.645
4	.770	.440	.550	.745
5	.965	.520	.720	.940
6	1.070	.640	.850	1.045
7	1.270	.740	1.010	1.245
8	1.485	.850	1.200	1.460
9	1.688	.980	1.400	1.665

Figure 1

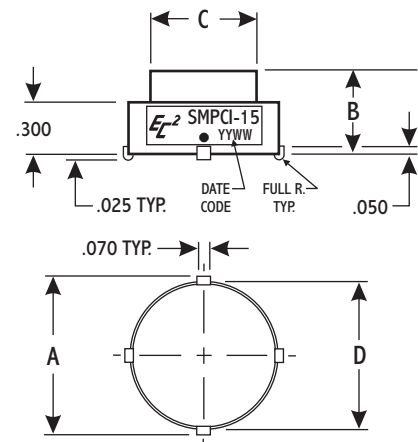

**engineered components company**

A Division of Cornucopia Tool & Plastics, Inc. PO Box 1915, 448 Sherwood Rd., Paso Robles CA 93447

Phone: 805-369-0034

Fax: 805-369-0033

Web: www.ec2.com