


# TTL Military Pulse Generator Module (Thinny)

The TTL Military Pulse Generator Modules (Thinny) manufactured by Engineered Components Company are designed to provide a precise output pulse width when triggered by variable pulse width inputs. These pulse generators provide a stable positive (+), as well as negative(-), output pulse of the specified width for each rising edge of the input pulse. The input pulse must stay high for a minimum of 10ns. No output pulse occurs for each falling edge of the input pulse. Maximum input pulse repetition rates are shown in the table below.


The MTBF on these modules, when calculated per MIL-HDBK-217, for a 50 deg.C ground fixed environment and with 50VDC applied, is in excess of 4 million hours. The temperature coefficient of delay is less than 1200 ppm/deg.C over a temperature range of -55 to +100 deg. C. These modules are designed to operate over the full military temperature range of -55 to +125 deg. C.

The module is provided in a 14-pin DIP package, fully encapsulated in epoxy resin and is housed in a Diallyl Phthalate case, red in color. The case marking is applied by silkscreen using white epoxy paint. The 5 copper leads are tin-lead plated and meet the solderability requirements of MIL-STD-202, Method 208.

## BLOCK DIAGRAM

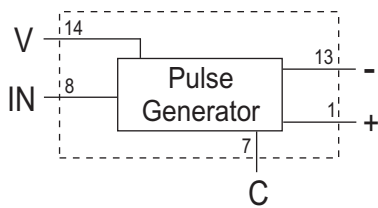

## MECHANICAL DIAGRAM

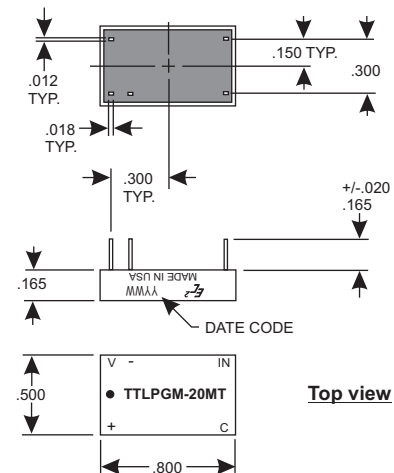

Product Selection Table

Part Number	Pulse Width (ns)	Maximum Pulse Rate (Mhz)
TTLPGM-5MT	5+/-1.0	98
TTLPGM-6MT	6+/-1.0	80
TTLPGM-7MT	7+/-1.0	70
TTLPGM-8MT	8+/-1.0	60
TTLPGM-9MT	9+/-1.0	54
TTLPGM-10MT	10+/-1.0	49
TTLPGM-15MT	15+/-1.0	32
TTLPGM-20MT	20+/-1.0	24
TTLPGM-25MT	25+/-1.0	19
TTLPGM-30MT	30+/-1.0	15
TTLPGM-35MT	35+/-1.5	13
TTLPGM-40MT	40+/-1.5	11
TTLPGM-45MT	45+/-1.5	10
TTLPGM-50MT	50+/-1.5	9
TTLPGM-60MT	60+/-1.5	8
TTLPGM-70MT	70+/-2.0	7
TTLPGM-75MT	75+/-2.0	6
TTLPGM-80MT	80+/-2.0	6
TTLPGM-90MT	90+/-3.0	5
TTLPGM-100MT	100+/-3.0	4

Special modules can often be manufactured to provide for customer specific applications.

## Operating Specifications:

All measurements made at 25 deg. C  
 All measurements made with Vcc = +5VDC  
 All measurements made with (1) TTL output load

Operating Temperature: -55 to +125 deg. C  
 Storage Temperature: -55 to +125 deg. C

Vcc Supply Voltage: 4.75 to 5.25VDC

Vcc Supply Current:

Constant "0" in = 45mA typical

Constant "1" in = 25mA typical

Logic "High" Input:

Voltage: 2.0VDC min. ; Vcc max.

Current: 2.4VDC = 50uA max. ; 5.5VDC = 1mA max.

Logic "Low" Input:

Voltage: 0.8 VDC max.

Current: -2.0mA max.

Logic "High" Voltage Out: 2.4VDC min.

Logic "Low" Voltage Out: 0.4VDC max.



**engineered components company**

A Division of Cornucopia Tool & Plastics, Inc. PO Box 1915, 448 Sherwood Rd., Paso Robles CA 93447

Phone: 805-369-0034

Fax: 805-369-0033

Web: www.ec2.com